


Data 19" Cabinet, (Depth 425mm & 600mm), Front perforated door, Wall Mounting

Have a modern, pleasing appearance and offer outstanding value

As telecommunications continue to grow and expand, the physical space in which they exist does not always grow at the same rate. Wall - Mount Systems overcome this hurdle by providing racks and cabinets that allow you to create locations for cables and equipment where space is limited or does not exist. Secure equipment on the wall inside or outside of the telecommunications room and connect remote groups of users to the network. This 9U wall mount cabinet comes with a lockable front door, removable side panels and two fans. The cabinets are fully vented with a lockable steel framed perforated door for safety and security. Quick release hinges allow for easy access to the cabinet for loading equipment and cables. Removable side panels allow access from each side and gland plate covers and cable strain relief positions are included in the top and bottom of the cabinets. The cabinets have a modern, pleasing appearance and offer outstanding value. The sturdy cabinets are quick and easy to install and provide an economic solution for cabling installations.



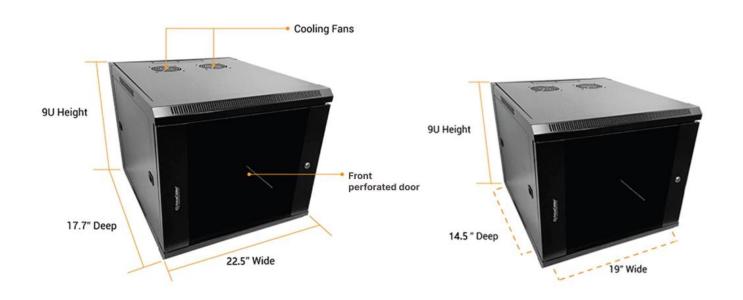

Product Dimensions

Usable Mounting Dimensions



PRODUCT IMAGES





• Aesthetically pleasing design with front perforated door









• Lockable, quick release side panels, for maximum access into cabinet








Angled vented roof




· Adjustable 19" mounting profiles



EXPLODED VIEW

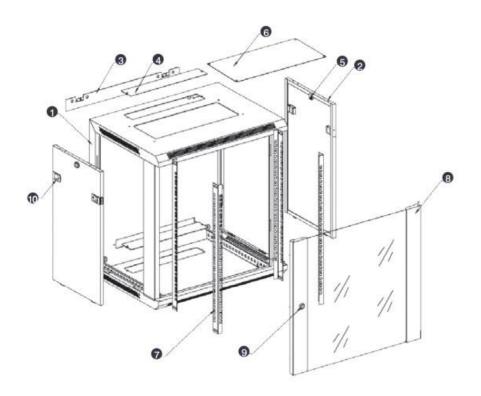

- Frame
- Side panel
- Mounting panel
- a Cable entry cover, removeable
- 3 Side key lock
- 6 Fan cover, removeable
- Mounting profile
- 8 Front door
- 9 Front door key lock
- ® Slam latch lock

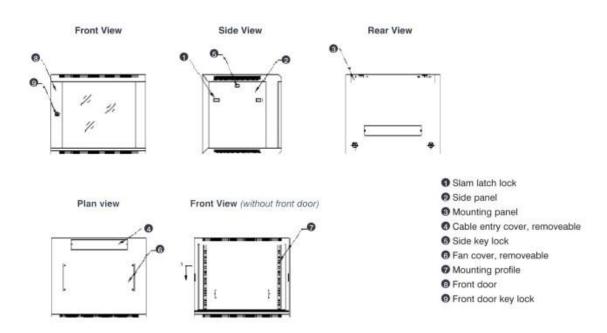



SPECIFICATIONS		
Color	Black or White - Powder Coated	
Material	SPCC Cold Rolled Steel	
Material Thickness	Mounting Profile: 1.2mm, others: 1.0mm and 0.8mm	
Doors	Steel + front Perforated door, opening direction of door can be changed	
	Turning angle of front door is over 180 degrees	
Removable Side Panels	Yes	
Cooling Fans	2 fans located on top panel	
Adjustable Mounting Profile Installation	Yes	
Assembly Required	Yes (Flat Packed)	
Loading Capacity	Maximum 132 lbs (60kg)	
able Entries Cable entry on both of top cover and bottom panel		
Width	19 inches	
Capacity	6U to 18U	
Product Dimensions	XX H, 22.5 W, 17.7 D inches (50 H, 57 W, 45 D cm)	
Front Rail and Read Depth	Adjustable depth 105mm 125mm 145mm 165mm 185mm 267mm 297mm 317mm 337mm 357mm (Measured from the Glass to the Rail)	
Usable Mounting Dimensions	6U/9U/12U/15U or 18U Height 590mm Wide Depth 425mm / 600mm	
ANSI/EIA	Yes	
RS-310-D	Yes	
IP Rating	IP20	
RoHS	Yes	
Reach	Yes	
Package Quantity	1 - Wall Mount Cabinet (Unassembled)	
Mounting Hardware	M5X10 self - tapping screws 8 pcs	
	M6X12 screws 8pcs M6X12 screws & square nuts 10SET	
Product Weight	18.5Kg- 26Kg	

WARRANTY		
Warranty	5 Year	