


NETLINK ADSS 8-Like Self-supporting Center Tube Optical Cable (8-6 Core)

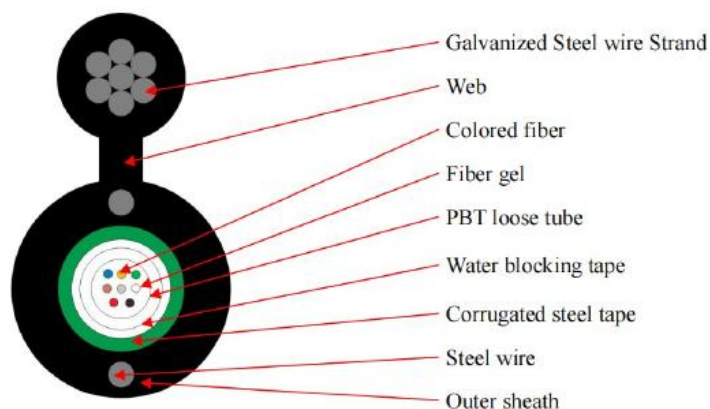

FEATURES

- Stainless Steel or galvanized steel self-supporting.
- Excelled mechanical and environmental performance.

APPLICATION

- Aerial self-supporting installation
- Telecom backbone access networks
- FTTH outdoor distribution
- Long distance outdoor communication links.

CABLE STRUCTURE

Fiber Count	6/ 8 / 12 / 24 Core
Loose Tube Material	PBT
Water Blocking	Fiber Gel / Water blocking System
Central Strength Member	Galvanized Steel Wire Strand
Armoring	Corrugated steel tape
Messenger Wire	Steel Wire
Messenger Wire Diameter	1.2 ± 0.1 mm
Cable Shape	Figure-8 self-supporting structure
Galvanized Steel wire Strand Diameter	1.2*7-3.6±0.1mm
PBT Loose Tube Diameter	2.3 ± 0.1 mm
Steel Wire Diameter	1.2±0.1mm
Outer sheath Cable Diameter	9.0 × 16.6 ± 0.5 mm

PRODUCT PARAMETERS

Parameter	Short Term	Long Term
Maximum Allowable Tension (MAT)	9200	
Max. Crushing Resistance	300	1000
Minimum Bending Radius	20D (Dynamic)	10D (Static)
Storage / operating temperature	-20°C to +60°C	

FIBER TYPE PARAMETERS

Optical Fiber Type	Waveband	Attenuation
SM G.652D	1310/1550 nm	0.36 / 0.24 dB/km
SM G.657A2	1310 / 1550 nm	0.36 / 0.24 dB/km
MM 50/125	850 / 1300 nm	3.5 / 1.5 dB/km
MM 62.5/125	850 / 1300 nm	3.5 / 1.5 dB/km